
VILLAGE OF PORT WASHINGTON NORTH

3 Pleasant Avenue
Port Washington, New York 11050
Tel: 516-883-5900 Fax: 516-883-5926
portwashingtonnorth.org

Date Approved	Permit #
Denial Basis	Date Paid
Superintendent	
APPLICATION FOR PUBLIC WORKS PERMIT	
The undersigned does hereby apply for a permit for the following:	
Location	
Purpose	
Dumpster	Road Opening
Peddling	Sidewalk, Apron, Curb, Curb Cut
Miscellaneous Public Works	Other
ApplicantSig	natureEmail
Address	Phone
Dumpster application must include: Location (2 property plans or surveys indice Provider's Name & Address; Duration; Work \$50 for 3 days, \$10 each additional day.	ating major structures & proposed location); Dimensions; kers Compensation & \$1 million Liability Insurance; Fee
Services being offered; Name & address of that firm/organization has not been dissolv	MV Abstract of Driver's Record; Description of goods/ firm/organization sponsoring the peddling; Statement red, enjoined or prohibited from engaging in peddling, ress to conduct or method of conducting said activities;
existing curb cuts; distances from the near	rk to be done; the length, width & depth of the opening; est intersection); Zoning; Workers Compensation & o Public Utilities (811); \$10,000 License or Permit Bond; eafter.

Sidewalk, Apron, Curb & Curb Cut applications must include:

Two Sketches (showing: location of the work to be done; the length, width & depth of the opening; existing curb cuts; distances from the nearest intersection); Zoning; Workers Compensation & \$500,000 Liability Insurance; Notification to Public Utilities (811); \$10,000 License or Permit Bond; \$100 Fee.

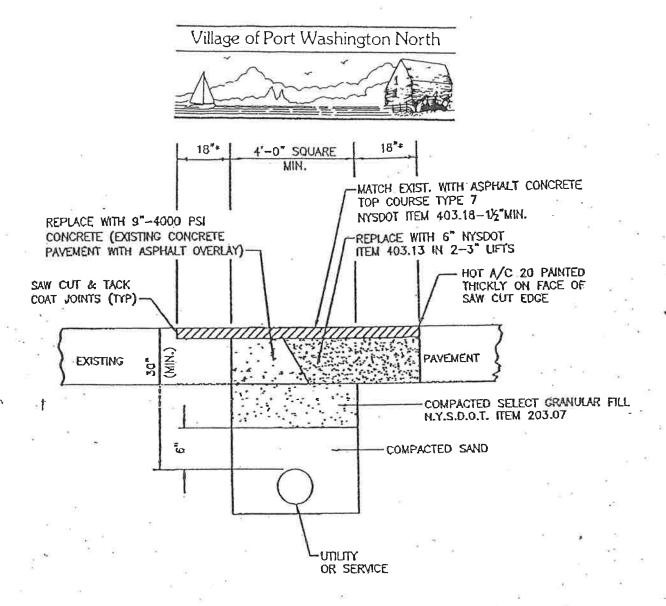

* 18" CUT BACK, OR TO CURB WHEN CURB IS LESS THAN 4" FROM EDGE OF PATCH

PAVEMENT & EXCAVATION RESTORATION DETAIL

N.T.S.


NOTES:


EXCAVATION SHALL BE BACKFILLED AND COMPACTED IN 6" LIFTS


TEMPORARY PAVEMENT REPLACEMENT WILL BE ALLOWED ONLY WHEN ASPHALT PLANTS ARE NOT IN OPERATION. WHEN TEMP. PAVEMENT IS USED. CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINANCE AND UPKEEP OF SAID PATCH UNTIL PERMANENT PATCH IS INSTALLED.

UPON THE AVAILABILTY OF ASPHALT, THE CONTRACTOR SHALL EXCAVATE TO THE ORDERED DEPTH AND REPLACE WITH THE REQUIRED MATERIALS TO THE LIMITS AND SPECIFICATIONS AS SHOWN IN THE DETAIL.


ROAD OPENINGS SHALL BE RESTORED WITH PAVEMENT MEETING THE VILLAGES SPECIFICATIONS, FROM THE CURB TO THE OPPOSITE CURB.

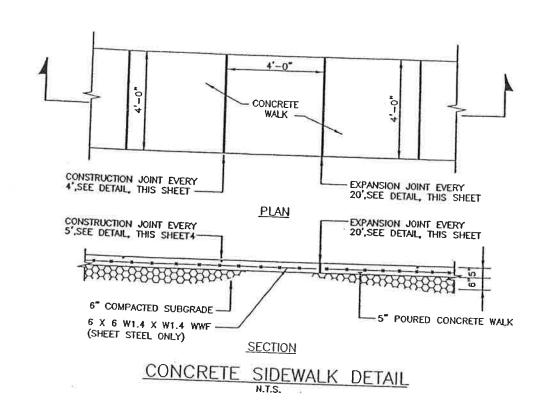

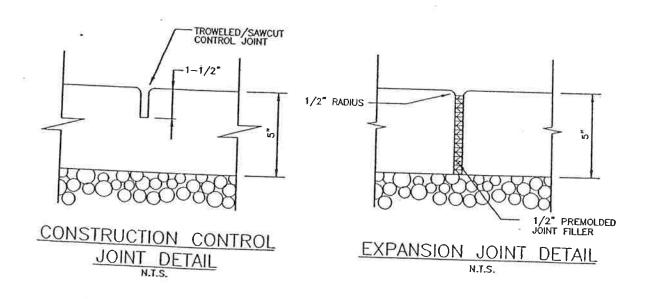

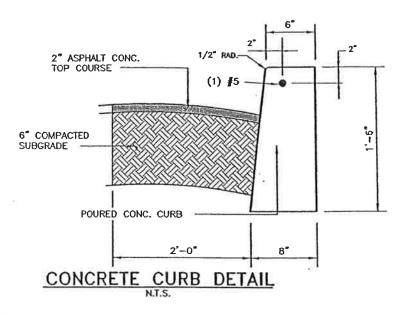


- 1. NEW CURB SHALL HAVE A SMOOTH TRANSITION WITH EXISTING CURB
- CURB REVEAL SHALL BE 6" EXCEPT AT DROP-CURB AND/OR HANDICAP RAMP. (SEE RESPECTIVE DETAILS)
- 3. 1/2" PRE MOLDED EXPANSION JOINT FILLER SHALL BE INSTALLED 20' O.C.

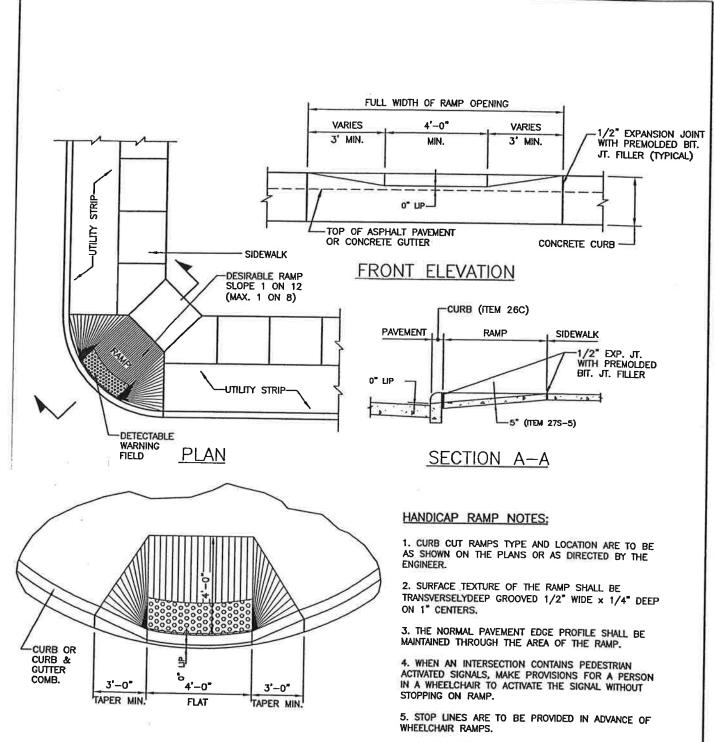


HANDICAP RAMP

CENTERED IN CORNER QUADRANT
(FOR ALL CORNERS WITHOUT OBSTRUCTIONS)
N.T.S.

6. WHERE FEASIBLE PROVIDE FOR DRAINAGE PICK UPS IMMEDIATELY UP STREAM FROM THE RAMP.

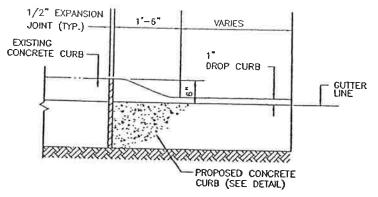

· HALF SECTION DRIVEWAY CURB CUT N.T.S.

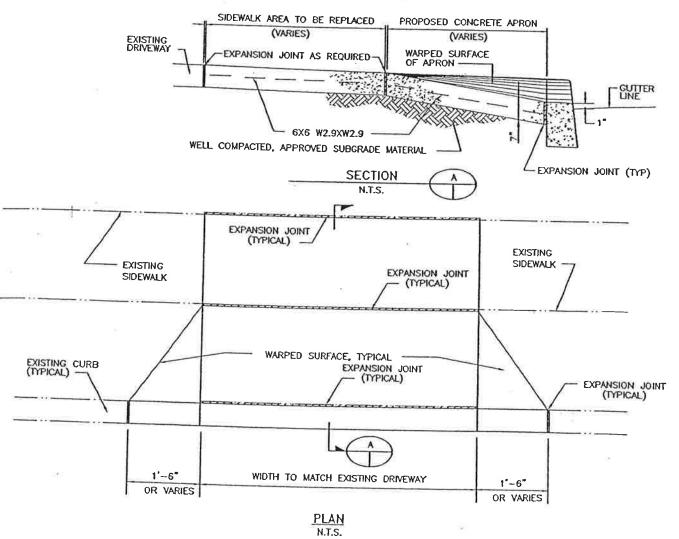

DETAILS OF DRIVEWAY APRON

PAYMENT FOR CURB UNDER ITEM 26C

